



## Guardrails for single-pole scaffold (light-duty)


Falls from scaffolds are one of the leading causes of injuries to construction workers in British Columbia.

All scaffolds 3 m (10 ft.) or more above grade must have standard guardrails on their open side.

A standard guard consists of:

- A top rail approximately 1.1 m (42 in.) above the platform
- An intermediate rail centred at approximately the midpoint of the space between the underside of the top rail and the upper edge of the platform
- Vertical guardrail supports spaced not more than 3 m (10 ft.) apart for wooden scaffolding

Standard guardrails must be designed to withstand a static load of 550 N (125 lb.) applied laterally at any point of the top rail.

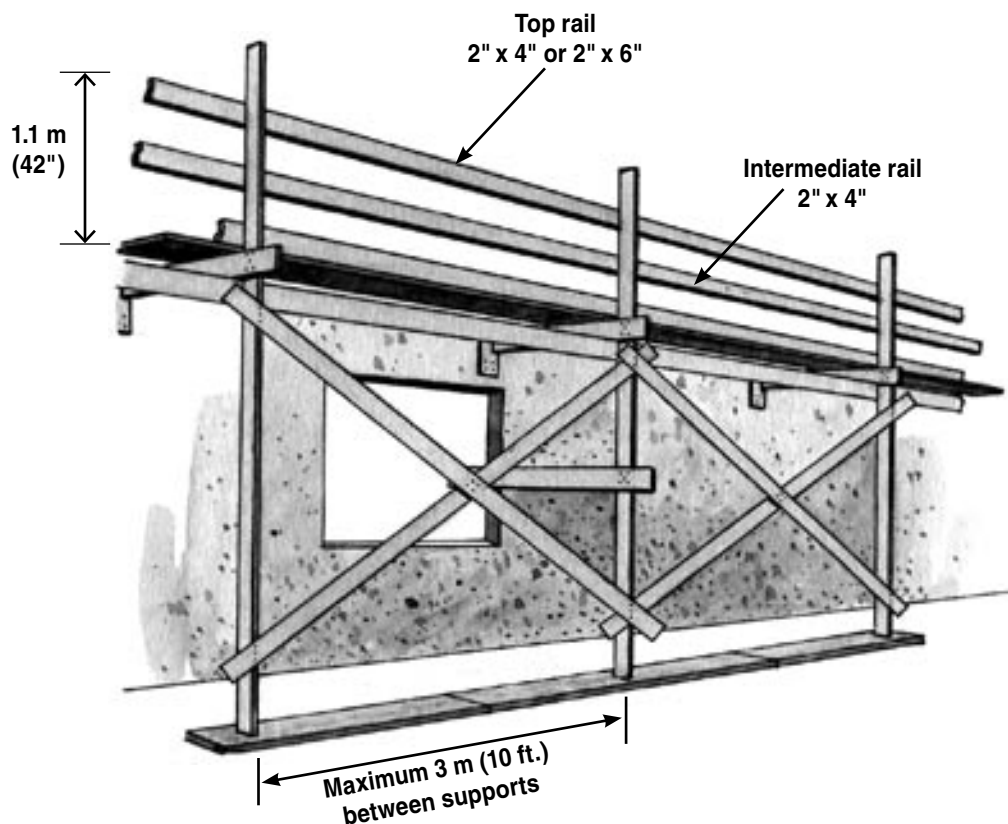

Project: \_\_\_\_\_ Address: \_\_\_\_\_

Employer: \_\_\_\_\_ Supervisor: \_\_\_\_\_

Date: \_\_\_\_\_ Time: \_\_\_\_\_ Shift: \_\_\_\_\_

Number in crew: \_\_\_\_\_ Number attending: \_\_\_\_\_

Other safety issues or suggestions made by crew members:

---

---

---

---

---

Record of those attending:

Name: (please print)	Signature:	Company:
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		

Manager's remarks: \_\_\_\_\_

---

Manager: \_\_\_\_\_ Supervisor: \_\_\_\_\_

*(signature)*

*(signature)*



WORKING TO MAKE A DIFFERENCE  
worksafebc.com